


Fleming



SIMPLICITY
IS OUR
STRENGTH



 UK&NI: +44 (0) 2871 342637

 ROI: 048 71 342637


 info@fleming-agri.com

Muck Spreaders

www.fleming-agri.com

Minimuck

1 Cubic yard capacity (MINIMUCK)

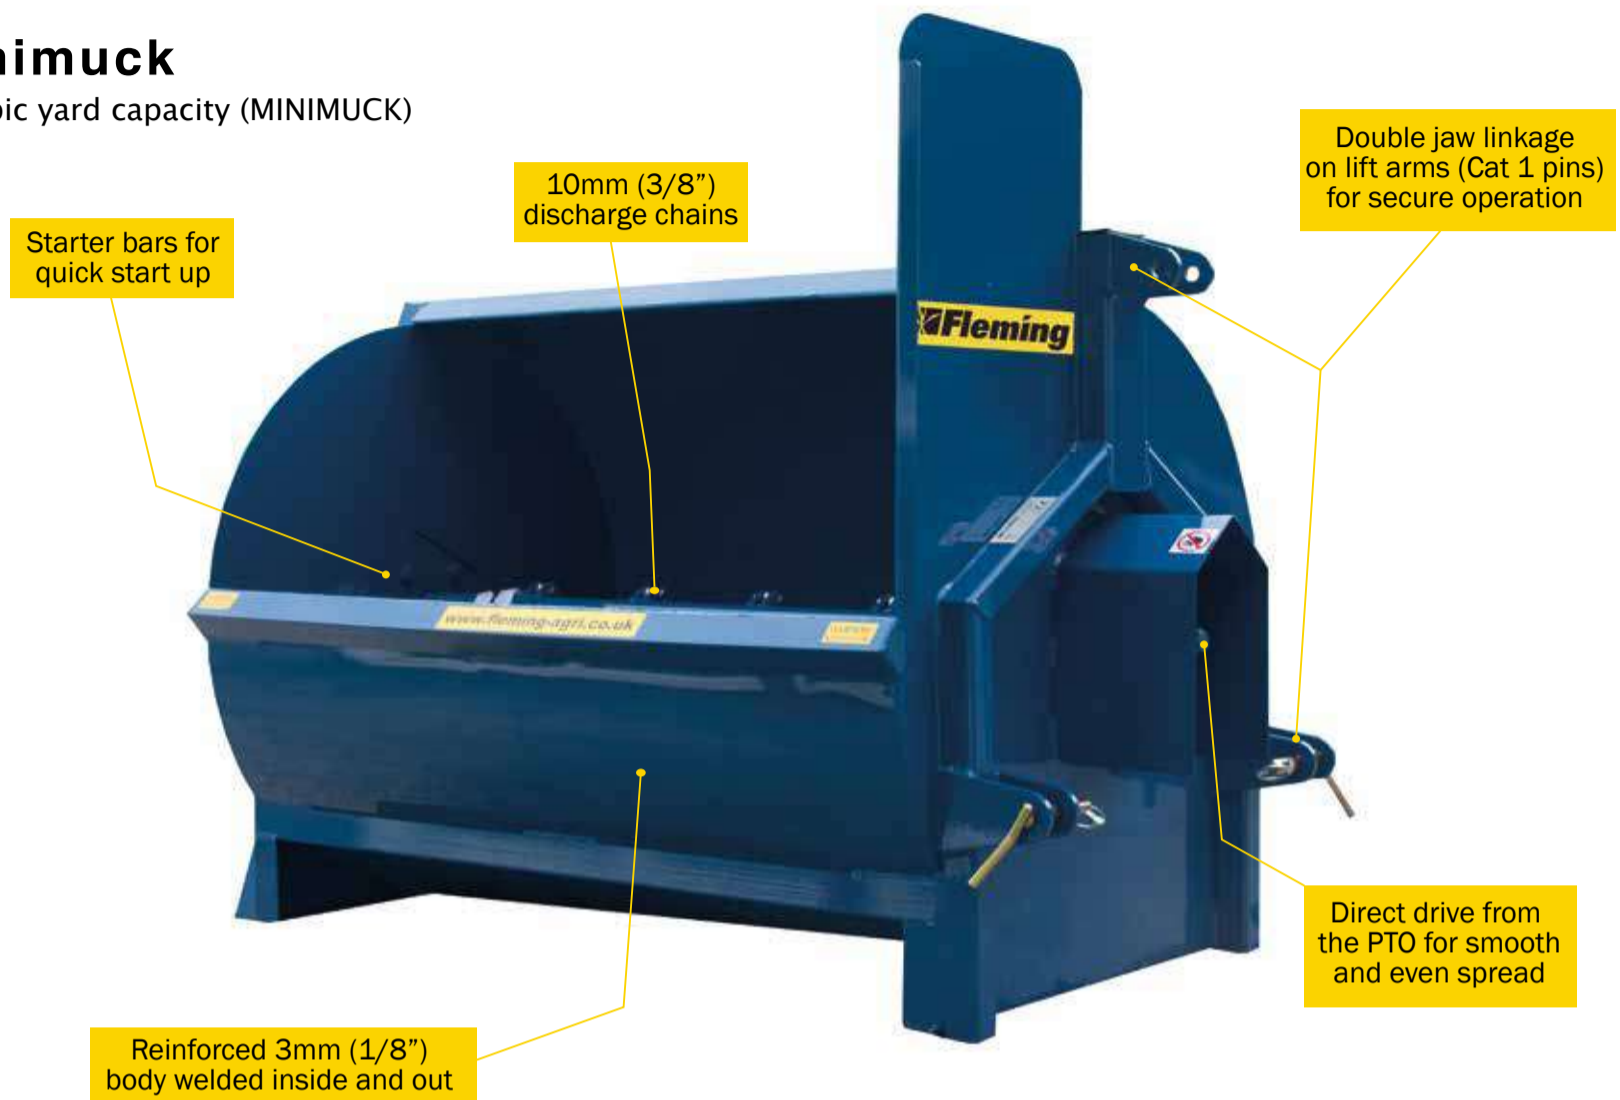

- 30-50HP requirement
- 1 yd³ capacity (0.85m³)
- PTO speed - 540 rpm
- 3/8" (10mm) discharge chains
- Easy access loading height - 600mm
- A five stage paint & heat treatment process for better corrosion protection and durability



Specification

Model	MINIMUCK
Cubic yard capacity	1
Power required	30hp
Door	N/A
Chain/Flails	10no x 10mm
Drum thickness	3mm
Overall length	1.5m
Width	1m
Loading height	60cm
Lights	N/A
Brakes	N/A
Unladen	200kg
PTO Speed	540rpm
Diameter of drum	90cm
Length of drum	125cm
Wheel sizes standard	N/A
Wheel sizes optional	N/A

MS150



- 25-50HP compact tractor requirement.
- 2.25yd³ capacity (1.7m³)
- PTO speed - 540 rpm
- Heavy duty 10mm hardened steel chain flails to give efficient unloading time
- 10mm (3/8") discharge chains
- 1m loading height



Specification

Model	MS150
Cubic yard capacity	2.25
Power required	30hp
Door	N/A
Chain/Flails	14no x 10mm
Drum thickness	3mm
Overall length	3m
Width	1.4m
Loading height	1m
Lights	N/A
Brakes	N/A
Unladen	500kg
PTO Speed	540rpm
Diameter of drum	1.05m
Length of drum	1.83m
Wheel sizes standard	10x80x12
Wheel sizes optional	N/A

MS450



- 35-80HP requirement
- 4 yd³ capacity (3m³)
- Heavy duty 4 bolt flange bearings mounted away from the body for low maintenance
- A five stage paint & heat treatment process for better corrosion protection and durability
- Starter bars for quick start up
- PTO speed - 540 rpm
- Pick up eye and shoe and PTO rest as standard
- Heavy duty 25mm (1") simplex drive chain
- Reinforced loading edge



Specification

Model	MS450
Cubic yard capacity	4
Power required	40hp
Door	Manual
Chain/Flails	20no x 10mm
Drum thickness	3mm
Overall length	4.07m
Width	1.84m
Loading height	1.2m
Lights	N/A
Brakes	N/A
Unladen	950kg
PTO Speed	540rpm
Diameter of drum	120cm
Length of drum	250cm
Wheel sizes standard	11.5x80x15.3
Wheel sizes optional	12.5x80x15.3

MS700



- 6.5yd³ capacity (5m³)
- 60 - 100HP requirement
- Heavy duty 4 bolt flange bearings mounted away from the body for low maintenance
- PTO speed - 540 rpm
- Heavy duty 30mm (1 1/4") simplex drive chain
- 6 ton - 6 stud - 70mm square bolt on axle for safe working operation with 385 x 65R x 22.5 as standard wheels
- Double starter bars for quick start up



Specification

Model	MS700
Cubic yard capacity	6.5
Power required	60hp
Door	HYD
Chain/Flails	28no x 13mm
Drum thickness	4mm
Overall length	4.7m
Width	2.1m
Loading height	1.48m
Lights	Standard
Brakes	Standard
Unladen	1500kg
PTO Speed	540rpm
Diameter of drum	140cm
Length of drum	3m
Wheel sizes standard	385x65rx22.5
Wheel sizes optional	12.5x80x15.3 550x45x22.5

MS 1000

Reinforced loading edge

Heavy duty balanced rotor with 12mm (1/2") discharge chains and spreader plates

Heavy duty galvanised hydraulic opening reinforced lid

Reinforced 6mm (1/4") end plates

Secure simple clip on galvanised chain guard for easy access

Geared down through a simple chain and sprocket drive line mounted on heavy duty bearings to reduce the power demand on the tractor and increase fuel efficiency

Pick up eye and shoe and PTO rest as standard

Reinforced 4mm (5/32") body welded inside and out

Reinforced drawbar for absolute rigidity when in operation

8 ton - 8 stud - 80mm (3 1/4") square bolt on axle to reinforced body support for safe working operation with 550 x 60 x 22.5 as standard

- 9.5yd³ capacity (7.25m³)
- 100 Hp minimum requirement
- 45mm (3/4") input shaft
- Heavy duty 4 bolt flange bearings mounted away from the body for low maintenance
- PTO speed - 540 rpm
- Double starter bars for quick start up
- Heavy duty 25mm (1") duplex drive chain
- Large wash-out bung



Specification

Model	MS1000
Cubic yard capacity	9.5
Power required	100hp
Door	HYD
Chain/Flails	36no x 13mm
Drum thickness	4mm
Overall length	5.6m
Width	2.5m
Loading height	1.67m
Lights	Standard
Brakes	Standard
Unladen	1800kg
PTO Speed	540rpm
Diameter of drum	150cm
Length of drum	370cm
Wheel sizes standard	550x60x22.5
Wheel sizes optional	POA

Muck Forks

- 5ft model (SGMF5) has 8 tines in base and 2 optional side tines
- 6ft model (SGMF6) has 9 tines in base and 2 optional side tines
- Ideal for muck and silage
- Heavy duty structural box section frame with bushed main beam
- Suitable for tractor mounted front end loaders



Specification

Model	SGMF5	SGMF6
Width (m)	1.5	1.82
Height (m)	1	1
Tines	10	11
Weight	153kg	172kg

General Purpose Grab

- 4ft model (SGB4) has 6 tines in base & 2 optional side tines for secure capacity
- 5ft model (SGB5) has 8 tines in base & 2 optional side tines
- 6ft model (SGB6) has 9 tines in base & 2 optional side tines
- Curved tines are seated in pinched sockets to prevent tine turning during operation
- 890mm opening for large payload
- All hinge points fitted with grease points
- 2 heavy duty hydraulic cylinders for good gripping action and low power requirement
- Locked pivot pins to prevent excessive wear with easy access grease points
- Good ram clearance for smooth operation
- Heavy duty structural box section frame with bushed main beam



Specification

Model	SGB4	SGB5	SGB6
Width (m)	1.25	1.52	1.84
Tines	12	15	17
Hyd Rams	2	2	2
Capacity (m ³)	0.5	0.7	0.9
Weight	218kg	240kg	310kg



Fleming Agri Products has over 160 years of manufacturing experience spanning over 5 generations of the Fleming family.

The company is now one of the leading manufacturers of agricultural equipment with a dealer network that covers not only the British Isles & Ireland, but also Europe, USA, Australia and New Zealand.

MEET OUR SALES TEAM



David Meban
Sales Manager
(Sales South West Eng & Wales)
Tel: +44 (0) 7794018020
davidmeban@fleming-agri.com



David Watters
(Sales Scot & N.Eng)
Tel: +44 (0) 7944682304
davidwatters@fleming-agri.com



Adrian Brown
(Sales Central & South East England)
Tel: +44 (0) 7778128054
adrianbrown@fleming-agri.com



Bryan Hunter
(Sales Ireland)
NI Tel: +44 (0) 7967721606
Rep of Ire Tel: 01 5267419
bryan@fleming-agri.com



Gareth Walker
(Office/Export Sales)
Tel: +44 (0) 7557782872
gareth@fleming-agri.com



Alison Duncan
(Marketing/Office Sales)
Tel: +44 (0) 7778128055
alison@fleming-agri.com

Contact sales executives on mobile numbers

NI : 02871 342637 ROI : 04871 342637

Newbuildings Industrial Estate,
Newbuildings, Northern Ireland, BT47 2SX

www.fleming-agri.com



DEALERS NATIONWIDE