

# NC

# SLURRY TANKERS

NC Vacuum Tankers have been around for more than 30 years and are now one of the most sought after slurry tankers available today.

Years of experience and a reputation for quality have produced a range of slurry tankers from 900 to 4000 gallons that have NC's superior build, quality and design standard.  
(Litres 4080 - 18160)

They are kind to the environment, simple to operate, with safety a priority. All tanks are manufactured with internal anti-collapse rings, full lighting and hydraulic brakes.



# NC

**WHERE QUALITY COMES FIRST!**



# Vacuum and Top Fill Tankers



Self-Locking Top Fill Lid



Extra Fill Valve



Over-the-hedge Boom




Quick Attach



Trailing  
Applic



Sprung Draw Bar

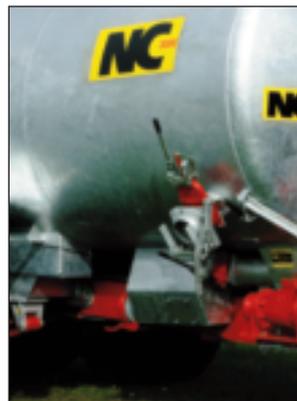

High Pressure C



The NC Top Fill Slurry Tanker is of the mechanical discharge type. It is manufactured from heavy duty plate to give you one of the thickest tank walls on the market. The centrifugal pump is to NC design 540 or 1000 PTO speed depending on spread pattern required; discharge is via a nozzle at the rear top of the tank which uses a low level spreading system delivering one of the most even spread patterns available. Hydraulic brakes are fitted as standard on all models. The tanker is fitted with a non-splash filling turret which has eliminated the need for a sliding door.



One of the most environmentally friendly methods of applying liquid slurry.




**WHERE QUALITY COMES FIRST!**

**g Shoe  
cator**



Centrifugal Pump

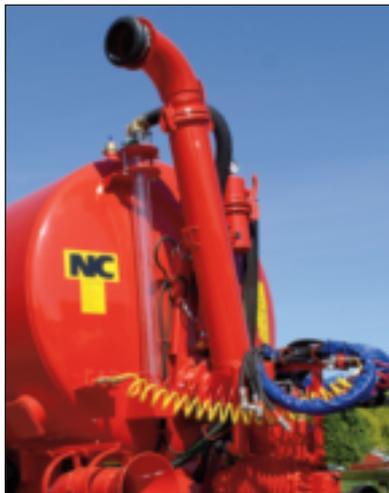

Auto-Fill Arm and full length Sight Glass



Automatic Discharge Arm for use with umbilical cord



# Slurry Tankers

	1100	1300	1600	1850	2050	2250	2500	3000	2050T#	2250T#	2500T#	3000T#
<b>Ltr</b>	5000	5900	7050	8410	9320	10228	11365	13638	9320	10228	11365	13638
<b>Wheel Size</b>	550x60x22.5	550x60x22.5	550x60x22.5	560x60x22.5	28.1x26	28.1x26	30.5x32	30.5x32	550x60x22.5	550x60x22.5	550x60x22.5	550x60x22.5
<b>Overall Width</b>	2470 97"	2470 97"	2520 99"	2520 99"	2740 108"	2740 108"	2790 110"	2790 110"	2520 99"	2520 99"	2520 99"	2520 99"
<b>Overall* Length</b>	5750 18'10"	5750 18'10"	6400 21'	6400 21'	6750 22'2"	7250 23'9"	7000 23'	7750 25' 5"	6750 22'2"	7250 23'4"	7750 25'5"	7750 25'5"
<b>Barrel Diameter</b>	1370 54"	1525 60"	1525 60"	1675 66"	1675 66"	1675 66"	18.30 72"	1830 72"	1675 66"	1675 66"	1675 66"	18.30 72"
<b>Galv Option</b>	●	●	●	●	●	●	●	●	●	●	●	●
<b>Pump Size</b>	9000	9000	9000	9000	11000	11000	11000	13500	11000	11000	11000	13500

\* For sludgigator type pump add 150mm # Twin-axle



While every attempt will be made to adhere to specified tyre size, due to circumstances beyond our control however, these may change from time to time.

STANDARD FITTINGS	
Lights	All Models
Mudguard's	On Some Models
Hydraulic Brakes	All Models
Quick Attach Filler Hose Attachment	All Models
6" Filler and Discharge Points	All Models
2 1/2" Washdown Adaptor	All Models
15' x 6" Suction Hose	All Models
4 x Fill Points	All Models
OPTIONAL EXTRA'S	
• Hydraulic Top - Fill Self Locking	• Stone Trap
• Additional Filling Valves	• Spring Drawbar
• Fully Opening Door	• Auto-Fill
• High-Speed Running Gear with Air Brakes	• Front & Rear Empty System



**WHERE QUALITY COMES FIRST!**

**NC ENGINEERING (HAMILTONSBAWN) LTD**

2 Killyrudden Road, Hamiltonsbawn, Richhill, Co. Armagh, N. Ireland BT61 9SF

Tel: 028 3887 1970 Fax: 028 3887 0362

E.mail: info@nc-engineering.com website: www.nc-engineering.com

In accordance with our policy of continued development we reserve the right to alter specifications and designs without notice